



# RCX C-Link Base Mode Configurations

1. "Extension cord mode" -- to EDT or other standard Camera Link Framegrabber

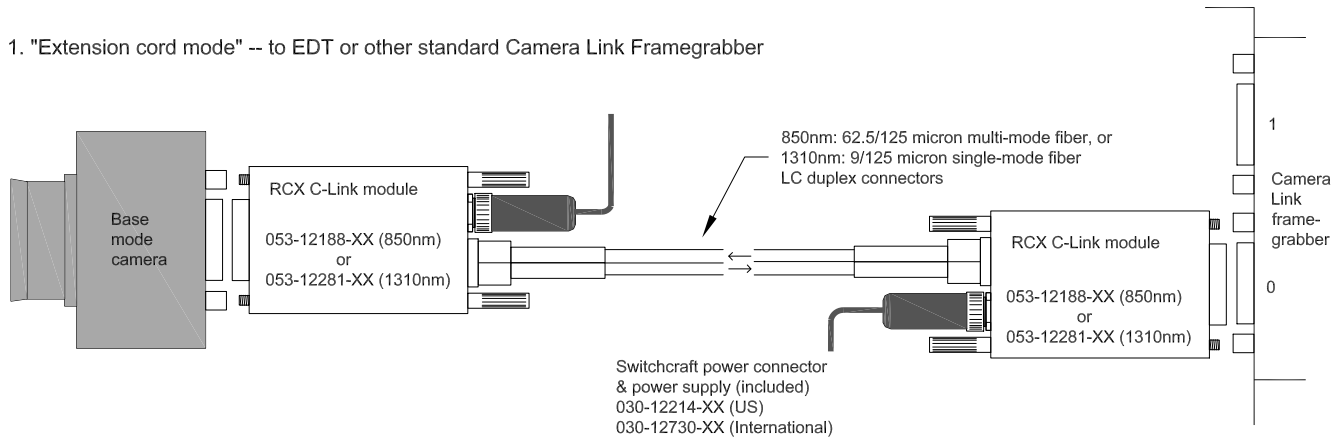

2. Direct to PCI / PCIe DV FOX fiber optic framegrabber\*

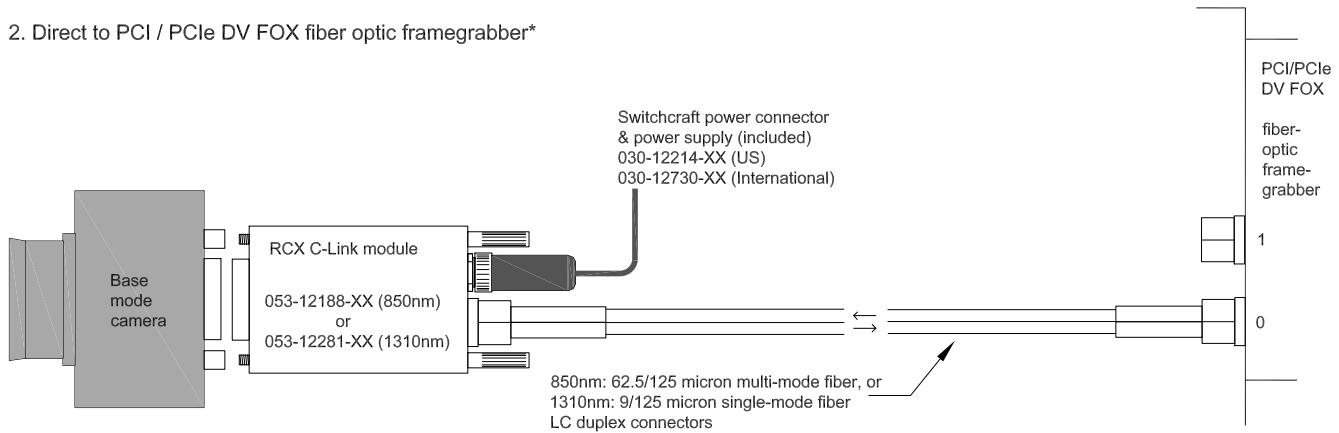

**Notes:**

1. "Standard" configuration is 850nm, 62.5/125 micron multi-mode fiber.
2. \*Direct-from-fiber FOX boards have been discontinued.