


RCX C-Link medium and full camera link configurations

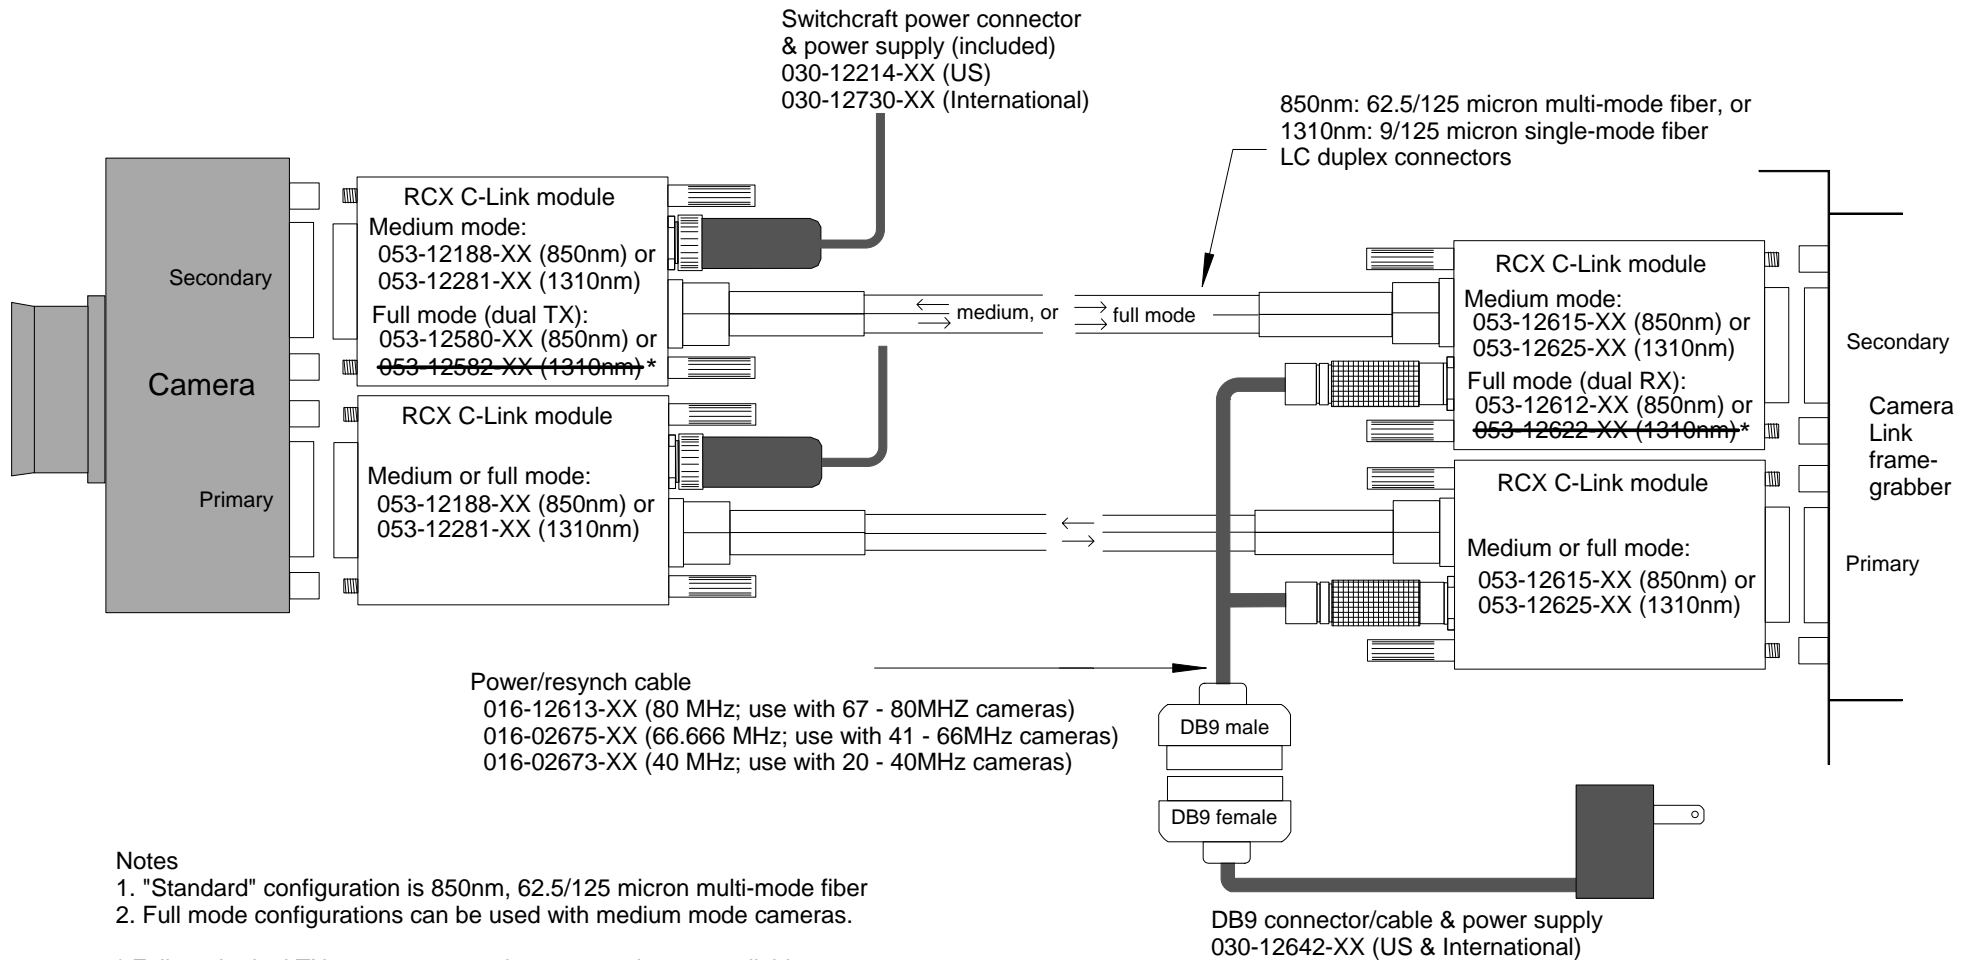

Notes

1. "Standard" configuration is 850nm, 62.5/125 micron multi-mode fiber
2. Full mode configurations can be used with medium mode cameras.

* Full mode dual TX 1310nm transceivers are no longer available